

PATENT
1920-111P

IN THE U.S. PATENT AND TRADEMARK OFFICE

Applicant: FRANCKE, Tom et al.
Appl. No.: New Group:
Filed: October 30, 2000 Examiner:
For: APPARATUS AND METHOD FOR RADIATION
DETECTION

10/30/00
09/698174
U.S. PTO

L E T T E R

Assistant Commissioner for Patents
Washington, DC 20231

October 30, 2000

Sir:

Under the provisions of 35 U.S.C. § 119 and 37 C.F.R. § 1.55(a), the applicant(s) hereby claim(s) the right of priority based on the following application(s):

<u>Country</u>	<u>Application No.</u>	<u>Filed</u>
SWEDEN	0002080-0	June 5, 2000

A certified copy of the above-noted application(s) is(are) attached hereto.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fee required under 37 C.F.R. §§ 1.16 or 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By 
John A. Castellano, #35,094

JAC/cqc
1920-111P

P.O. Box 747
Falls Church, VA 22040-0747
(703) 205-8000

Attachment

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

BSK B 703-305-500
FRANKE et al.
1920-111P
1081

Intyg Certificat



Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande XCounter AB, Danderyd SE
Applicant (s)

(21) Patentansökningsnummer 0002080-0
Patent application number

(86) Ingivningsdatum 2000-06-05
Date of filing

Stockholm, 2000-10-09

För Patent- och registreringsverket
For the Patent- and Registration Office

Therese Friberger

Avgift
Fee 170:-

PATENT- OCH
REGISTRERINGSVERKET
SWEDEN

Postadress/Adress
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 86
08-666 02 86

APPARATUS AND METHOD FOR RADIATION DETECTION

TECHNICAL FIELD OF THE INVENTION

The present invention generally relates to an apparatus and method for detection of radiation.

- 5 The invention is usable in a variety of fields including e.g. medical radiology, computerized tomography (CT), microscopy, and non-destructive testing.

DESCRIPTION OF RELATED ART AND BACKGROUND OF THE INVENTION

- 10 Gaseous detectors, in general, are very attractive at photon energies lower than approximately 10 keV. The main advantages of gaseous detectors are that they are cheap to manufacture compared to solid state detectors, and that they can employ gas multiplication to strongly (on orders of magnitude) amplify the signal amplitudes. However, at energies exceeding 10 keV the
15 gaseous detectors are less attractive as the stopping power of the gas decreases rapidly with increased photon energy. This results in a heavily deteriorated spatial resolution due to parallax errors of the conversion points of the often divergent incident beam of radiation, and due to extended tracks of so-called long-range electrons, which are created as a result of
20 the X-ray absorption.

- 25 An improved spatial resolution is achieved by a gaseous detector for use in planar beam radiography, in which electrons released by interactions between photons and gas atoms can be extracted in a direction essentially perpendicular to the incident radiation. A detector of such a kind is described in our copending international application No. PCT/SE98/01873 entitled *A method and a device for planar beam radiography and a radiation detector* and filed on October 19, 1998.

Such detector comprising interactions between photons and gas atoms need, however, to be relatively deep and comprise a pressurized gas. Further, such detector need to use a gas optimized both for interaction with the incident radiation and
 5 with accelerating electrons (during the electron multiplication).

SUMMARY OF THE INVENTION

An object of the present invention is to provide an apparatus and method for detection of ionizing radiation, which employ
 10 avalanche amplification, and by which measurements of high spatial resolution are obtainable.

A further object of the present invention is to provide an apparatus and method for detection of ionizing radiation, which exhibit high signal-to-noise ratios.

15 Still a further object of the invention is to provide an apparatus and method for detection of ionizing radiation, which are sensitive and can thus be used employing very low X-ray fluxes.

Yet a further object of the present invention is to provide an
 20 apparatus and method for detection of ionizing radiation, which are effective, fast, accurate, reliable, easy to use, and of low cost.

Still a further object of the invention is to provide an
 25 apparatus and method for detection of ionizing radiation, in which electrons released during detection, can be extracted in a direction essentially perpendicular to the incident radiation. Hereby it is possible to obtain a particularly high spatial resolution.

Yet a further object of the invention is to provide an apparatus
 30 and method for detection of ionizing radiation, which can

operate at high X-ray fluxes without performance degradation and has a long lifetime.

These objects among others are, according to the present invention, attained by apparatus and methods as claimed in the
5 appended Claims.

By employing avalanche amplification of electrons released from a photocathode of the detection apparatus a particularly sensitive apparatus and method are achieved, which provide for the employment of extremely low doses of radiation, still
10 obtaining signal levels high enough for construction of images, which exhibit very low noise levels.

A further advantage of the invention is that the inventive detector apparatus is not very sensitive to magnetic fields.

Yet a further advantage of the invention is that it provides for
15 the manufacture and use of sensitive large-area detector apparatus to a low cost.

Further characteristics of the invention and advantages thereof will be evident from the following detailed description of preferred embodiments of the invention, which are shown in the
20 accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will become more fully understood from the detailed description of embodiments of the present invention given hereinbelow and the accompanying Figs. 1-3, which are
25 given by way of illustration only, and thus are not limitative of the invention.

Fig. 1 illustrates schematically, in cross sectional view, an arrangement for planar beam radiography, according to a first embodiment of the present invention.

Fig. 2 is a schematic, partly enlarged, cross sectional view of the first embodiment as taken along A-A in Fig. 1.

Fig. 3 illustrates schematically, in cross sectional view, an arrangement for planar beam radiography, according to a second embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular dimensions and materials in order to provide a thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known apparatus and processes are omitted so as not to obscure the description of the present invention with unnecessary details.

With reference to Fig. 1, which schematically illustrates, in a sectional view in a plane orthogonal to the plane of a planar X-ray beam 1, an arrangement for planar beam radiography, a first embodiment of the present invention will be described.

The arrangement includes an X-ray source (not shown), which together with a collimator window 5, produce the planar fan-shaped X-ray beam 1, for irradiation of an object 7 to be imaged. The collimator window 5 can be replaced by other means for forming an essentially planar X-ray beam, such as an X-ray diffraction mirror or an X-ray lens etc.

The beam transmitted through the object 7 enters a detector apparatus 9. Optionally a slit or collimator window 11, which is aligned with the X-ray beam and forms the entrance for the X-ray beam 1 to the apparatus 9, is provided. A major fraction of the incident X-ray photons are detected in detector 9, which

includes chamber 13, 53, photocathode 17,18, avalanche cathode 21, and avalanche anode 27, 29 arrangements.

The apparatus 9 is arranged and oriented such that the X-ray beam can enter sideways between the photocathode arrangement 17, 18 and the avalanche cathode arrangement 21, and impinge on the photocathode arrangement at grazing incidence, i.e. at a small grazing angle α . Preferably the relationship between the thickness t of the planar beam, the grazing angle α , and the depth D of apparatus 9 (i.e. length in the direction of incident radiation) are arranged such that a major portion of the photocathode arrangement is irradiated by beam 1. Note that the planar beam thickness and the grazing angle α have been exaggerated in Fig. 1 for illustrative purposes. Typical values are a planar beam thickness t of about 50-500 μm , a grazing angle α of about 0.05-500 mrad (preferably 0.50-50 mrad), and a detector apparatus depth D of about 1-10 cm.

The photocathode arrangement 17, 18 comprises a dielectric substrate 17, and a thin photocathode layer 18, which preferably is a 0.00001-0.1 mm thick layer of CsI, or an organic photo converters or any other efficient gaseous, liquid or solid photo converter. The photocathode layer material should have a low work function such that it can release photoelectrons in dependence on the incident radiation beam 1, i.e. the work function has to be lower than the photon energy of radiation beam 1.

Further photocathode arrangement 17, 18 may comprise a protective layer on the photocathode layer surface (not shown in Fig. 1), which preferably is a 0.01-1 μm thick layer of e.g. CsI. Photocathodes are generally sensitive to small impurities in any gas in contact with it, which impurities cause degradation of the quantum efficiency of the photocathode with time. Thus, the protective layer shall protect the photocathode

layer 18 from direct contact with gases within chamber 13, 53, of apparatus 9, but shall be transparent to the incident radiation as well as to the electrons released from the photocathode layer surface. Further, the protective layer shall
 5 advantageously be opaque to light since there may occur fluorescence in chamber 13, 53 and this fluorescence light has to be prevented from reaching the photocathode layer and thus from striking out more electrons, which would affect the detection in an unwanted manner. If the protective layer is not
 10 opaque to light it can be covered by a thin metallic layer, which is opaque to light and transparent to incident radiation and electrons.

The electrode arrangements 17, 18 and 21 are preferably mutually substantially parallel and separated by a short distance, e.g.
 15 10 μ m-10 mm. Further, during use, a first voltage is applied between photocathode 18 and avalanche cathode 21, resulting in a drift field in region 13 causing drift of electrons towards electrode 21.

Chamber 13, 53 is preferably filled with a gas, which can be for
 20 example CO₂ or a mixture of for example helium and isobutane, or any other gas suitable for electron avalanche multiplication. The gas is preferably at atmospheric pressure, but can be both at under- as well as overpressure. In such instance, the detector includes a gas tight housing 31 with a slit entrance
 25 window 33 of a radiation permeable material, through which the X-ray beam 1 enters the detector. Further, it shall be appreciated that the gas mixture composition and pressure are selected such that the gas does not absorb incident radiation beam 1, or only absorb incident radiation to a smaller extent.

Apparatus 9 is arranged such that the released photoelectrons
 30 will drift towards and enter an electron avalanche amplification region, preferably by passing through avalanche cathode arrangement 21, and wherein they will be multiplied by means of

a second voltage, which, during use, is applied between avalanche cathode arrangement 21 and avalanche anode arrangement 27, 29. The avalanche anode arrangement comprises a conductive anode layer 27 on a dielectric substrate 29.

5 The second voltage is selected such that photoelectrons from chamber section 13 pass cathode 21 and is accelerated towards anode arrangement 27, 29 resulting in electron multiplication and thus multiple avalanche electrons reaching arrangement 27, 29. The avalanche anode arrangement constitutes preferably also
10 a read-out arrangement of apparatus 9 for the detection of pulses induced by the electron avalanches.

Alternatively, the read-out arrangement can be formed separated from anode arrangement 27, 29 (not shown in Fig. 1).

The read-out arrangement 27, 29 is further connected to a signal
15 processing device (not shown in Fig. 1) for further processing of the detected pulses. The pulses derivable from ionization by different X-ray photons are individually detectable, and hence single-photon detection is realized.

The X-ray source, the collimator window 5, the optional
20 collimator window 11 and the detector 9 are preferably connected and fixed in relation to each other by a suitable means for example a support (not shown in Fig. 1).

Referring next to Fig. 2, which shows a schematic, partly
25 enlarged, cross sectional view, taken along A-A of Fig. 1, the detector, will be further described. It shall, however, be appreciated that the present invention is not limited to such a design. For instance, other possible avalanche amplification means designs are further elaborated in our co-pending Swedish patent application No. 9901325-2 entitled *Radiation detector, an
30 apparatus for use in planar radiography and a method for detecting ionizing radiation* filed on April 14, 1999, which application hereby is incorporated by reference. It shall

further be appreciated that the avalanche amplification means may comprise a solid-state device or comprise a liquid amplification region.

A dielectric 49 may thus be arranged between avalanche cathode 21 and avalanche anode 27. This could be a gas or a solid substrate 49 carrying cathode 21 as shown in Fig. 2. The second voltage, which, during use, is applied between cathode 21 and anode 27, produces an electric field in a plurality of preferably gas-filled avalanche amplification regions 53. Electrical field lines between a single one of the readout elements 27 and the photocathode layer 18 are schematically indicated by reference numeral 55 in Fig. 2. The avalanche regions 53 are formed in a region between and around the edges of the avalanche cathode 21 which are facing each other, and between the avalanche cathode 21 and the avalanche anode 27, where, during use, a concentrated electric field will occur due to the applied voltages.

The avalanche regions 53 are formed by openings or channels in cathode 21 and in the dielectric substrate 49, if present. The openings or channels can be of arbitrary shape, e.g. having a circular or a square cross section. The openings or channels may be arranged in rows, each row of openings or channels including a plurality of openings or channels. A plurality of longitudinal openings or channels or rows of channels are formed beside each other, parallel with each other or with the incident X-rays. Alternatively, the openings or channels can be arranged in other patterns.

Conductive anode layer comprises a number of pads or strips 27, which also form the read-out elements, are arranged in connection with the openings or channels forming the avalanche regions 53. Preferably at least one element 27 is provided for each opening or channel. The elements 27 are electrically insulated from each other by means of substrate 29, and

separately connected to the signal processing device (not illustrated).

By providing a plurality of read-out elements 27 as shown in Fig. 2 a detector 9 is achieved, wherein electron avalanches derivable mainly from ionization by transversely separated portions of the planar radiation beam 1 are separately detectable. Hereby, detector 9 provides for one-dimensional imaging. Preferably, the elements are elongated and pointed toward the radiation source. In such instance elements 27 are preferably put in a fan-shaped arrangement due to divergence of and finite distance to the radiation source.

The width of the inventive detector apparatus is preferably adapted to the intended use. Typical widths are up to 50 cm for medical X-ray applications, but for some particular applications the width may be as small as 0.1 mm comprising a single detector element.

In operation, the detector apparatus 21 of Fig. 1 is positioned in the path of the radiation desired to be detected. Rays of incident radiation emanating directly from the subject under examination will travel in a path so as to pass through collimator 11 and enter photocathode layer 18, whereas unwanted radiation scattered from the subject under examination towards the detection device will typically travel at some angle to the plane of the collimator and thus will not be able to traverse collimator 11.

Photons from the incident radiation hitting the photocathode layer 18 will cause electrons, so called photoelectrons, to be emitted. It is important that the material of the photocathode has a characteristic energy called work function (i.e. the binding energy of the cathode electrons) that is lower than the photon energy of the incident light so that electrons can be released.

- The released photoelectrons, which will have a kinetic energy being the difference of the photon energy and the photocathode work function, are drifted towards the avalanche cathode 21 (which is held at a higher electric potential than the photocathode layer 18). At the avalanche cathode 21 the photoelectrons will be accelerated due to the strong concentrated electric field between the avalanche cathode 21 and anode 27, 29 arrangements (the avalanche anode layer 27 is held at a much higher electric potential than the avalanche cathode).
- 10 The accelerated electrons will interact with other substance (e.g. atoms, molecules etc.) in regions 59, causing electron-ion pairs to be produced. Those produced electrons will also be accelerated in the field, and will interact repetitively with new materia, causing further electron-ion pairs to be produced.
- 15 This process continues during the travel of the electrons in the avalanche region towards anode arrangement 27, 29 located at the bottom of the avalanche region, and in such way electron avalanches are formed.

The electron avalanches induce electric pulses in the read-out elements of detector apparatus 9, which are individually detected as each readout element has its individual signal conduit to the signal processing device (not illustrated). The signal processing device processes the pulses; it possibly shapes the pulses, and integrates or counts thereafter the pulses from each readout element 27.

With reference next to Fig. 3, which schematically illustrates a device for planar beam radiography, a second embodiment of the present invention will be depicted. This embodiment is identical with the first embodiment except of how the incident radiation beam 1 is arranged to enter the detector and impinge on the photocathode arrangement 17, 18.

Apparatus 9 is here arranged such that the X-ray beam 1 can enter the apparatus through collimator 11 and hit the photocathode arrangement 17, 18 at grazing incidence from above. Substrate 17 has in this instance to be of a radiation transparent material such that radiation beam 1 can propagate through substrate 1 and be absorbed in photocathode layer 18.

It shall be appreciated that photocathode layer is thin such that it is capable of releasing electrons from the surface opposite to the surface onto which the photons are impinging.

10 It shall further be appreciated that as radiation beam 1 does not pass through chamber section on its travel towards photocathode layer 18, the gas mixture composition and pressure within chamber section 13 may be selected independently of how it absorbs the incident radiation.

15 Other features and characteristics of the inventive detector apparatus as described with reference to the first embodiment are also applicable as regards this second embodiment.

In the embodiments described above particular locations and geometries of photocathode, anode, cathode, and read-out arrangements are described. There are, however, a plurality of other locations and geometries that are equally well suitable in connection with the present invention.

25 It is general for the invention that each incident X-ray photon causes one induced pulse in one (or more) detector electrode element.

30 It is also general for the invention that the inter-electrode volumes are thin, which results in a fast removal of ions, which leads to low or no accumulation of space charges. This makes operation at high rate possible. The small distances leads also to low operating voltages, which results in low energy in possible sparks, which is favorable for the electronics. The

focusing of the field lines in the avalanche means is also favorable for suppressing streamer formations, which leads to a reduced risk for sparks.

Further, there will in such instance be possible to
5 geometrically discriminate unwanted radiation, such as
fluorescent X-rays, which otherwise would lead to deteriorated
spatial resolution and sensitivity. Such detection is further
elaborated in our co-pending Swedish patent applications No.
9901326-0 entitled *A method for detecting ionizing radiation, a*
10 *radiation detector and an apparatus for use in planar beam*
radiography filed on April 14, 1999 and No. 0000388-9 entitled
Detector and method for detection of ionizing radiation filed on
February 08, 2000. These applications are hereby incorporated by
reference.

15 As an alternative, the electric field in the conversion and
drift gap (volume) can be kept high enough to cause electron
avalanches, hence to be used in a pre-amplification mode.

As a further alternative, at least in some instances, the
electrode arrangement 21 may be dispensed with, and an electric
20 field between layer 18 and elements 27 can be kept high enough
to cause electron avalanche amplification within the complete
volume as defined by regions 13 and 53.

Further, all electrode surfaces may be covered by a resistive
material in order to decrease the energy in possible sparks,
25 which would influence the measurement and could destroy
electronic equipment of the detector. Such resistive layers are
further described in our co-pending Swedish patent application
No. 9901327-8 entitled *Radiation detector and an apparatus for*
use in radiography filed on April 14, 1999. The application is
30 hereby incorporated by reference.

Alternatively, for the same reason, the complete electrodes may be made of a semi-conducting material, e.g. silicon, or only layers 18 and 27 may be of a semi-conducting material.

It will be obvious that the invention may be varied in a plurality of ways. For example, the voltages can be applied in other ways as long as the described electrical fields are created. Such variations are not to be regarded as a departure from the scope of the invention. All modifications as would be obvious to one skilled in the art are intended to be included within the scope of the appended Claims.

10

CLAIMS

1. An apparatus (9) for detection of radiation comprising:

- a photocathode layer (18) adapted to release photoelectrons in dependence on incident radiation;

5 - a radiation entrance (33) arranged such that a beam (1) of radiation can be entered into the apparatus through said radiation entrance and can impinge on said photocathode layer at grazing incidence;

10 - an electron avalanche amplifier (21, 27, 29, 53) adapted to avalanche amplify photoelectrons released from said photocathode layer; and

- a readout arrangement (27, 29) adapted to detect avalanche amplified electrons from said amplifier.

15 2. The apparatus as claimed in Claim 1, wherein the radiation entrance is arranged such that the beam of radiation can impinge on a first surface of the photocathode layer; and said photocathode layer is adapted to release photoelectrons from said first surface, in dependence thereon.

20 3. The apparatus as claimed in Claim 1, wherein the radiation entrance is arranged such that the beam of radiation can impinge on a first surface, a back surface, of the photocathode layer; and said photocathode layer is adapted to release photoelectrons from a second surface, a front surface, in dependence thereon, said first and second surfaces being opposite to each other.

25 4. The apparatus as claimed in any of Claims 1-3, wherein the photocathode layer is 0.00001-0.1 mm thick.

5. The apparatus as claimed in any of Claims 1-4, wherein the photocathode layer is of a material having a work function, which is lower than the photon energy of said radiation beam.

6. The apparatus as claimed in any of Claims 1-5, wherein the photocathode layer is of CsI or an earth metal.

7. The apparatus as claimed in any of Claims 1-6, wherein the photocathode layer is provided with a protective layer, said
5 protective layer being transparent to electrons; and the photocathode layer is adapted to release photoelectrons through said protective layer.

8. The apparatus as claimed in Claim 7, wherein the protective layer is opaque to light.

10 9. The apparatus as claimed in Claim 8, wherein the protective layer is provided with a thin, preferably metallic, layer, which is transparent to electrons and opaque to light.

10. The apparatus as claimed in any of Claims 7-9, wherein the protective layer is transparent to said radiation beam.

15 11. The apparatus as claimed in any of Claims 1-10, wherein the radiation entrance is arranged such that the beam of radiation can be entered into the apparatus and can impinge on said photocathode layer at a grazing angle α , which is lower than 500
20 mrad, preferably in the interval 0.05-500 mrad, and more preferably in the interval 0.50-50 mrad.

12. The apparatus as claimed in any of Claims 1-11, wherein the radiation entrance is provided with a window, which is transparent to said radiation beam.

13. The apparatus as claimed in any of Claims 1-12, comprising a
25 collimator (11) arranged in front of said radiation entrance.

14. The apparatus as claimed in any of Claims 1-13, wherein the electron avalanche amplifier includes an array of avalanche amplification regions (53) filled with an avalanche amplification medium.

15. The apparatus as claimed in Claim 14, wherein the avalanche amplification medium is a gas or a gas mixture.
16. The apparatus as claimed in Claim 14, wherein the avalanche amplification medium is a liquid.
- 5 17. The apparatus as claimed in Claim 14, wherein the avalanche amplification medium is a solid.
18. The apparatus as claimed in any of Claims 14-17, wherein the individual avalanche amplification regions (53) are separated from each other by a dielectric (49).
- 10 19. The apparatus as claimed in any of Claims 1-18, wherein the electron avalanche amplifier includes an avalanche cathode (21) and an avalanche anode (27, 29) arrangement, respectively.
20. The apparatus as claimed in Claim 19, wherein the avalanche cathode (21) is permeable to electrons.
- 15 21. The apparatus as claimed in Claim 19 or 20, wherein the avalanche anode and readout arrangements are comprised of a single arrangement (27, 29).
22. The apparatus as claimed in any of Claims 1-21, wherein the readout arrangement (27, 29) includes an array of readout
20 elements (27).
23. The apparatus as claimed in any of Claims 1-22, wherein the radiation entrance is arranged such that a planar radiation beam (1) can be entered into the apparatus through said radiation entrance and can impinge on said photocathode layer at grazing
25 incidence; and the read-out arrangement (27, 29) is arranged such that electron avalanches derivable mainly from absorption of transversely separated portions of said planar radiation beam are separately detectable.

24. An arrangement for use in planar beam radiography, characterized in that it comprises an X-ray source, means (5) for forming an essentially planar X-ray beam (1) located between said X-ray source and an object (7) to be imaged, and the detector (9) as claimed in any of the preceding Claims located and arranged for detection of the planar X-ray beam as transmitted through or reflected off said object.

25. A method for detection of radiation in a detector apparatus (9) comprising a radiation entrance (33), a photocathode layer (18), an electron avalanche amplifier (21, 27, 29, 49, 53), and a readout arrangement (27, 29), said method comprising the steps of:

- introducing a beam (1) of radiation into the detector apparatus through said radiation entrance such that said radiation beam impinges on said photocathode layer at grazing incidence;
- releasing photoelectrons in dependence on said incident radiation beam by means of said photocathode layer;
- avalanche amplifying the photoelectrons released from said photocathode layer by means of said electron avalanche amplifier; and
- detecting the avalanche amplified electrons by means of a readout arrangement.

26. The method as claimed in Claim 25, wherein the photoelectrons are released from a first surface of said photocathode layer, in dependence on the radiation beam impinging on said first surface.

27. The method as claimed in Claim 25, wherein the photoelectrons are released from a first surface, a front surface, of said photocathode layer, in dependence on the radiation beam impinging on a second surface, a back surface, of

said photocathode layer, said first and second surfaces being opposite to each other.

28. The method as claimed in any of Claims 25-27, wherein the introduced radiation beam comprises photons having a photon
5 energy, which is higher than the work function of the photocathode layer.

29. The method as claimed in any of Claims 25-28, wherein the beam of radiation is introduced such that it impinges on said photocathode layer at a grazing angle α , which is lower than 500
10 mrad, preferably in the interval 0.05-500 mrad, and more preferably in the interval 0.50-50 mrad.

30. The method as claimed in any of Claims 25-29, wherein the photoelectrons are avalanche amplified in an array of avalanche amplification regions (53) filled with an avalanche
15 amplification medium, preferably an ionizable substance such as a gas or a gas mixture.


31. The method as claimed in any of Claims 25-30, wherein a planar radiation beam (1) is introduced into the apparatus through said radiation entrance such that it impinges on said
20 photocathode layer at grazing incidence; and electron avalanches derivable mainly from absorption of transversely separated portions of said planar radiation beam are separately detected by means of said read-out arrangement.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150

ABSTRACT

The present invention relates to an apparatus (9) for detection of radiation comprising a photocathode layer (18) adapted to release photoelectrons in dependence on incident radiation; a
5 radiation entrance (33) arranged such that a beam (1) of radiation can be entered into the apparatus through said radiation entrance and can impinge on said photocathode layer at grazing incidence; an electron avalanche amplifier (21, 27, 29, 53) adapted to avalanche amplify photoelectrons released from
10 said photocathode layer; and a readout arrangement (27, 29) adapted to detect avalanche amplified electrons from said amplifier. The invention further relates to a corresponding method for detection of ionizing radiation and to an arrangement for use in planar beam radiography comprising the detector
15 apparatus.

(Fig. 1 suggested for publication)



1/2

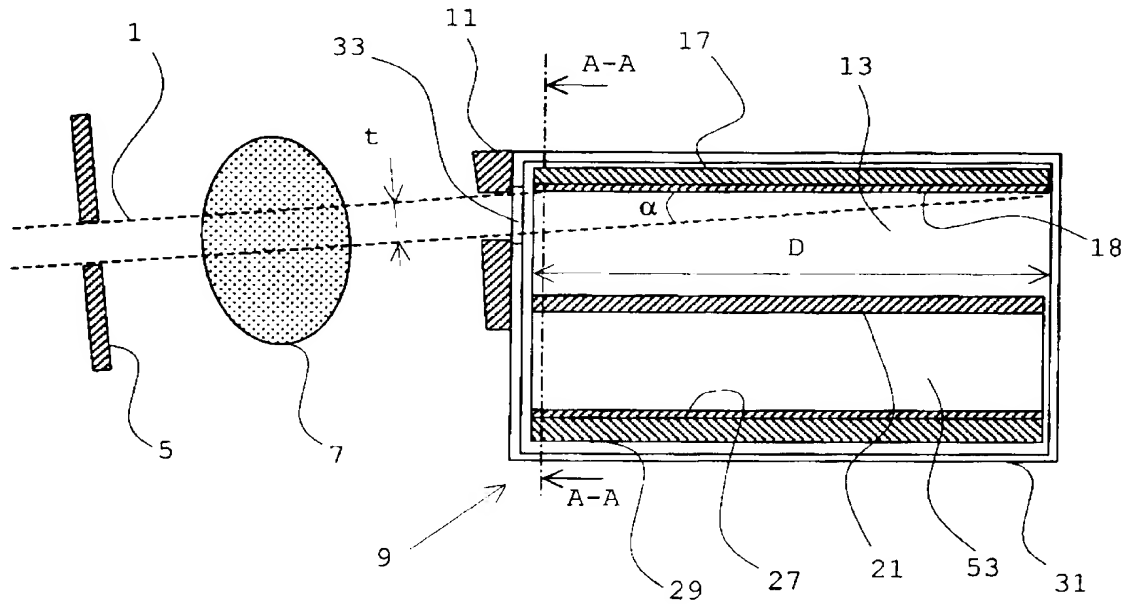


Fig. 1

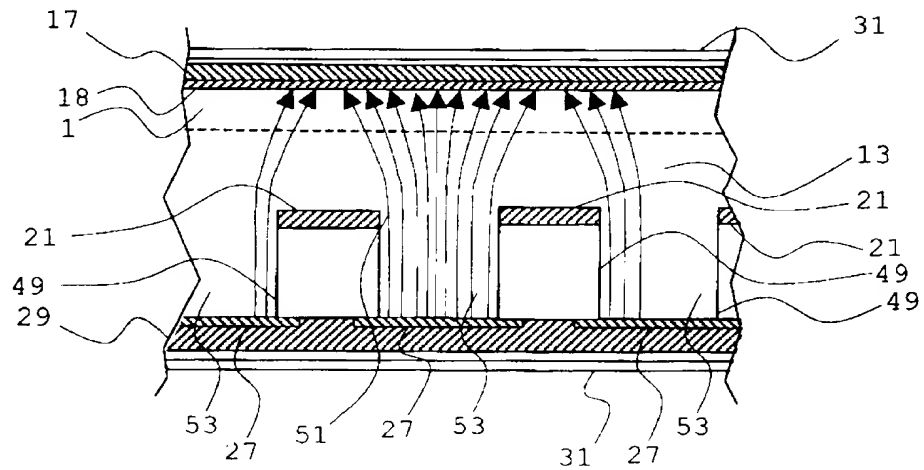


Fig. 2

2/2

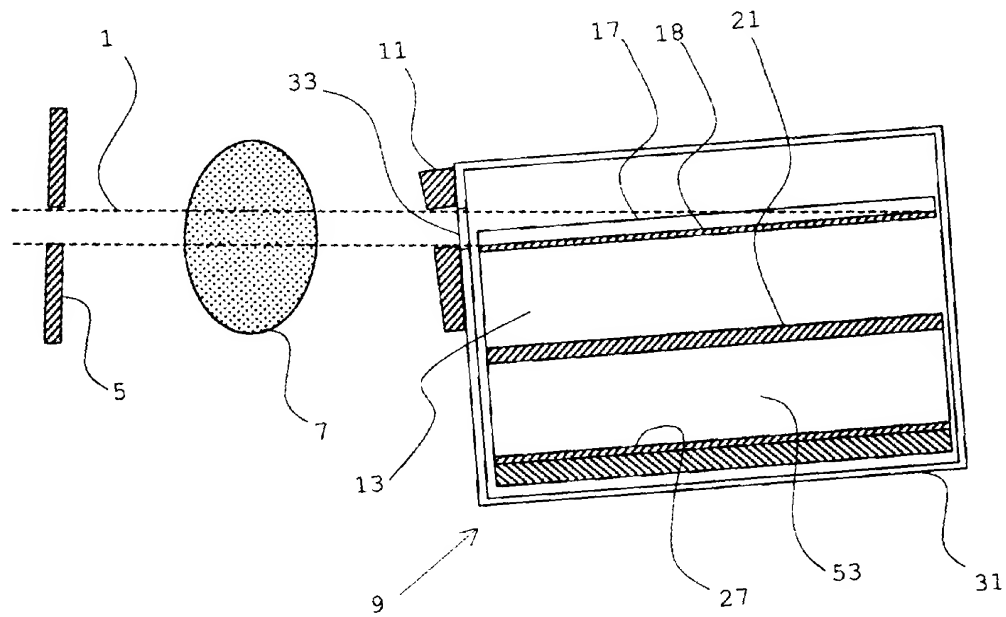


Fig. 3